






# iHD323 POE Smart Camera



## Features



-  Biometric Capture
-  Tracking
-  Filtering
-  Vivid HD Image
-  Simple Setup

Description	Part Number
Ceiling Adaptor	TR-JB04-C-IN
Wall Mount	TR-WM04-IN
Power Supply	GS-PWR-1A

## Specifications

<b>Image</b>	Chip	SOC + AI Accelerator	
	Resolution	2560 x 1440	
	Shutter	1/25 s ~ 1/10000 s - auto adjust	
	Min Illumination	Color: 0.0005 Lux @ F1.2; Black & White: 0.00001 Lux @ F1.2	
	Optical Zoom	2.7 mm - 13.5 mm	
<b>Video</b>	Compression	Ultra 265/H.264/MJPEG	
	Streams	Main stream	4MP (2560 x 1440)
		Sub streams	D1(720x576)/1080P
	Max Frame Rate	30 fps	
	Bit Rate	32 Kbps ~16 Mbps	
<b>Object Detection</b>	Feature Analysis	Face capture, tracking and filtering	
	Image Format	JPEG encoding	
<b>Network</b>	Interface	RJ45 - 10/100 Ethernet	
	Protocol	IPv4, HTTP, TCP/IP, UDP, RTP, RTCP, UPNP, RTSP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP	
	Users	Up to 6 simultaneously	
<b>General Parameters</b>	Housing	White aluminum	
	Power Supply	DC 12 V 1 A or POE 802.3af	
	Operating Environment	-35°C~60°C, 95% RH (non-condensing)	
	Size (mm)	148 D x 111.3	
	Weight (g)	920	

## Camera Placement

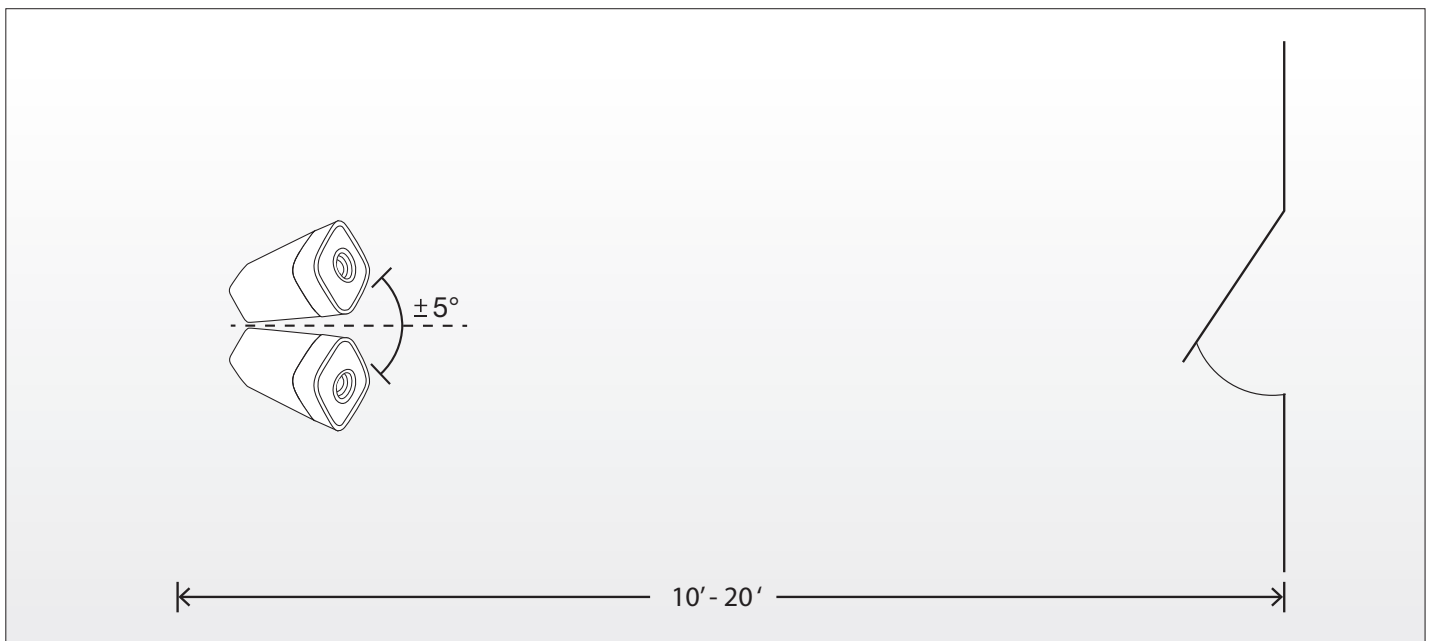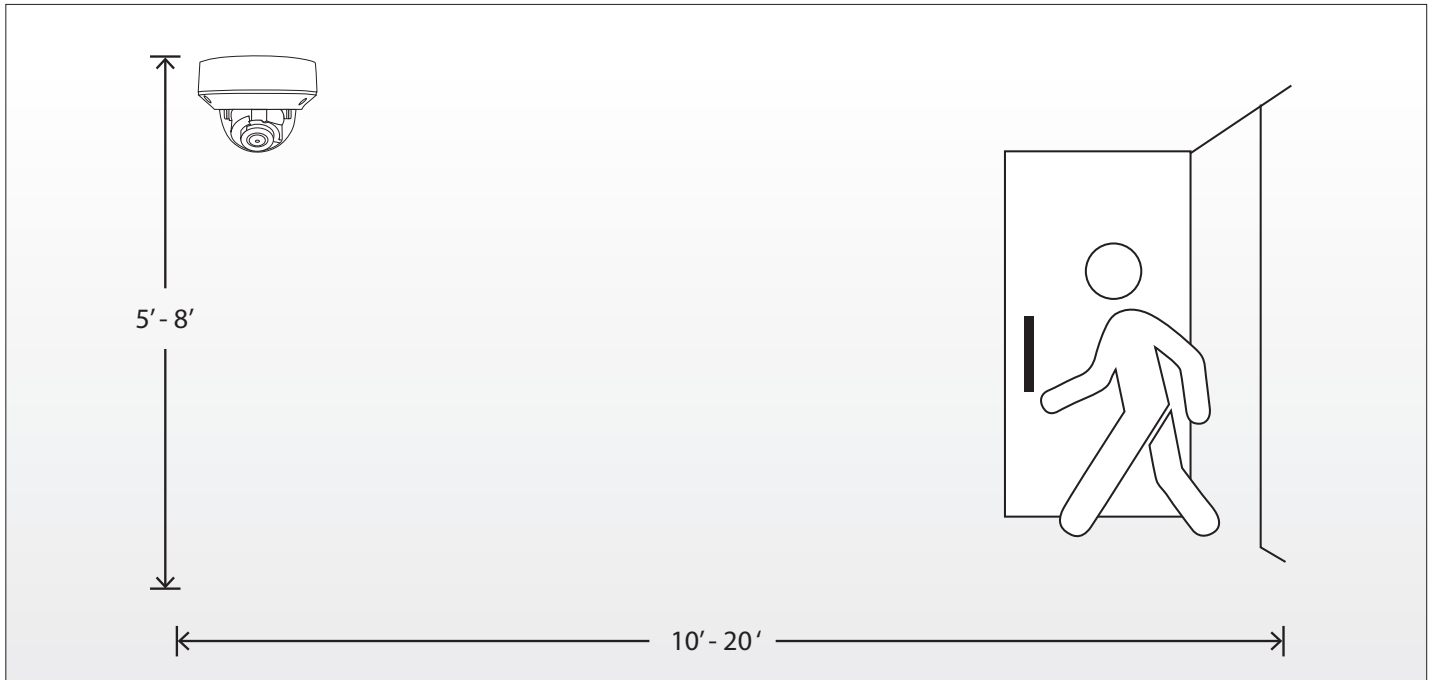

- 1 Straight line of sight with minimum angle provides best performance
- 2 10 feet: Zoom Out (2.7mm)  
20 feet: Zoom In (13.5mm)

### Note:

The placement recommendations are for optimal performance. pdActive's algorithms are extremely robust and achieve world class performance in less than ideal settings.

## Ceiling Mount Example

